



talkit.ca

No strings attached.

Please follow instructions before trying to make any calls.

For further information on other features please visit our 'How to' section at www.talkit.ca



You MUST activate your device *ONLINE* BEFORE you install it. Your device **WILL NOT** work until it is activated. If you have problems during activation or installation please call 1-888-289-1593 and press option 1. **DO NOT ATTEMPT TO INSTALL YOUR DEVICE UNTIL YOU HAVE ACTIVATED IT!**


STEP 1: Activating your device

1. Go to www.talkit.ca
2. Login using the account information that was emailed to you when you created your account.
3. Once your logged in, go to the Home Page.
4. Enter the MAC address of your device in the Talkit Activation Window on the bottom right corner of the first page.
5. The system will then ask you to pick the area of the number you want from a drop down list.
6. Choose the area (city).
7. Click Confirm Area Code Selection.
8. Click View My Account, you should now see the your new phone number under the devices.
9. Now you can connect your device.

STEP 2A: Connecting your Talkit Home Phone with Cable Internet

1. Plug your Talkit Home Phone LAN port into a PC or Router
2. Plug the power into the Talkit Home Phone.
3. Plug your Talkit Home Phone WAN into your MODEM.
4. Restart your MODEM, restart your Talkit Home Phone.
5. If you connected it properly your Talkit Home Phone LAN and WAN lights will flash in sync for about 5 mins.
6. Plug a phone into Phone 1... start making calls!.

Wiring Diagrams

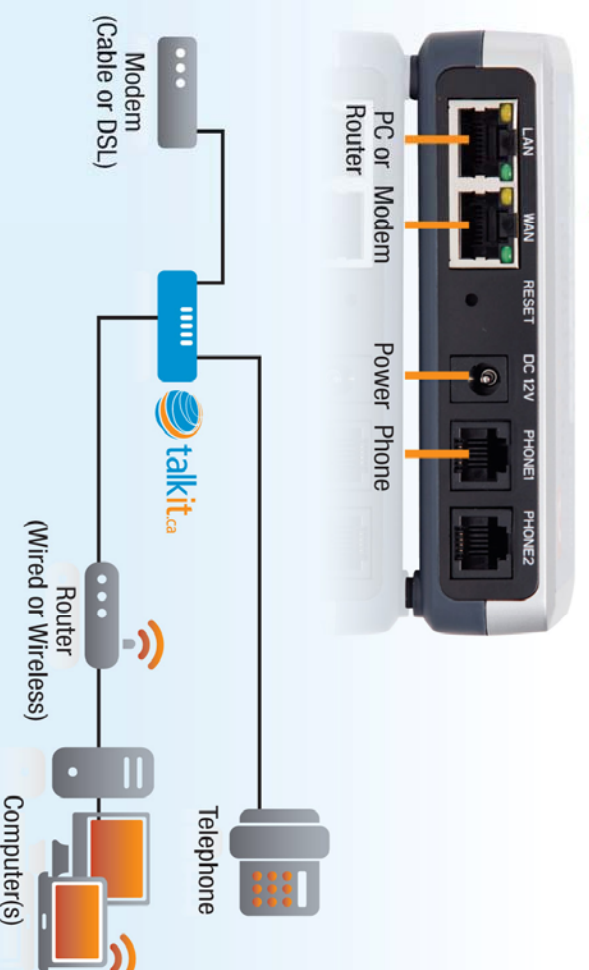

STEP 2B: Connecting your Talkit Home Phone with DSL Internet

1. Plug your Talkit Home Phone LAN port into a PC/laptop.
2. Plug the power into the Talkit Home Phone.
3. Repair your PC Local Area Network Connection. If your not sure how, visit: www.microsoft.com/windowsxp/using/networking/maintain/repair.mspx
4. Open Internet Explorer.
5. In the address bar type 192.168.2.1 then press enter.
6. Login to the Talkit device using the password 'admin'.
7. Click the Basic Settings Tab.
8. Select PPPoE.
9. Enter the correct information for: PPPoE account ID, PPPoE password, PPPoE Service Name, Preferred DNS server. (Your ISP can provide this information.)
10. Scroll down to the LAN DHCP Base IP and change it to 192.168.2.29
11. Scroll down to the bottom of the page and hit Update, the click Reboot.
12. Plug your Talkit Home Phone WAN into your MODEM.
13. Plug your PC or Router in the Talkit Home Phone LAN port.
14. Restart your MODEM, restart your Talkit Home Phone.
15. If you connected it properly your Talkit Home Phone LAN and WAN lights will flash in sync for about 5 mins.
16. Plug a phone into Phone 1... start making calling.

You MUST activate your device *ONLINE* BEFORE you install it. Your device **WILL NOT** work until it is activated. If you have problems during activation or installation please call 1-888-289-1593 and press option 1. **DO NOT ATTEMPT TO INSTALL YOUR DEVICE UNTIL YOU HAVE ACTIVATED IT!**