



No strings attached.
talkit.ca

Please follow instructions before trying to make any calls.

For further information on other features please visit www.talkit.ca



You MUST activate your device ONLINE BEFORE you install it. Your device WILL NOT work until it is activated. If you have problems during activation or installation please call 1-888-289-1593 and press option 1. DO NOT ATTEMPT TO INSTALL YOUR DEVICE UNTIL YOU HAVE ACTIVATED IT!


STEP 1: Activating your device

1. Go to www.talkit.ca
2. Login using the account information that was emailed to you when you created your account.
3. Once your logged in, go to the Home Page.
4. Enter the MAC address of your device in the Talkit Activation Window on the bottom right corner of the first page.
5. The system will then ask you to pick the area of the number you want from a drop down list.
6. Choose the area (city).
7. Click Confirm Area Code Selection.
8. Click View My Account, you should now see the your new phone number under the devices.
9. Now you can connect your device.

STEP 2: Connecting your Talkit Home Phone

1. Connect a standard touch-tone analog telephone to FXS port.
2. Insert the Ethernet cable into the LAN port of the Talkit.ca device and connect the other end of the Ethernet cable to an uplink port (a router or a modem, etc.)
3. Insert the power adapter into the Talkit.ca device and connect it to a wall outlet.
4. Restart your modem and or router.

Wiring Diagrams

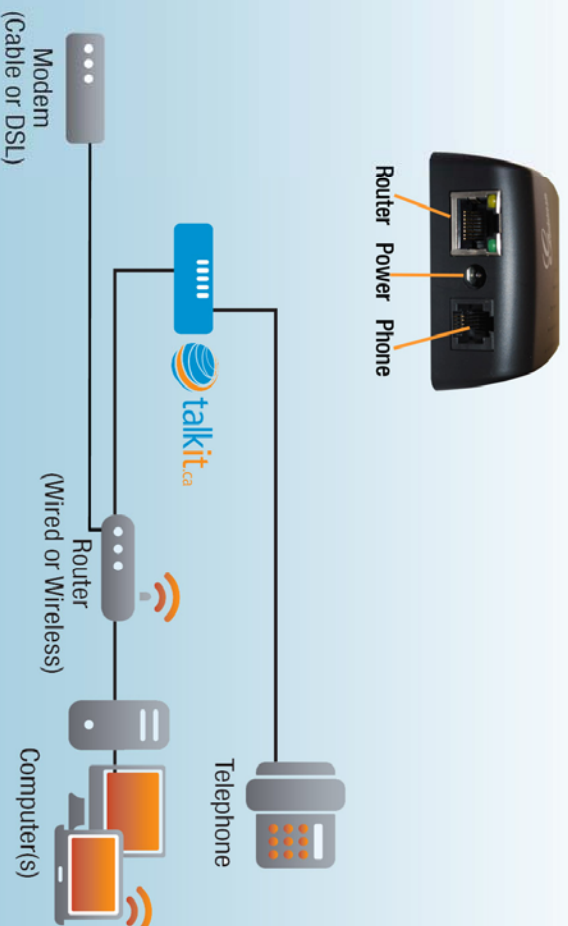

CALLING FEATURES

- *23 3-way conference
 - *30 Block Caller ID (for all subsequent calls)
 - *31 Send Caller ID (for all subsequent calls)
 - *50 Disable Call Waiting (for all subsequent calls)
 - *51 Enable Call Waiting (for all subsequent calls)
 - *67 Block Caller ID (per call)
 - *70 Disable Call Waiting (per call)
 - *71 Enable Call Waiting (per call)
 - *72 Unconditional Call Forward. Dial “*72”, wait for dial tone, dial the forward number and “#” for a dial tone, then hang up.
 - *73 Cancel Unconditional Call Forward. To cancel “Unconditional Call Forward”, dial “*73”, wait for dial tone, then hang up.
 - *82 Send Caller ID (per call)
 - *87 Blind Transfer
 - *90 Busy Call Forward. Dial “90”, wait for dial tone. Then dial the forward number and “#” for a dial tone, then hang up.
 - *91 Cancel Busy Call Forward. To cancel “Busy Call Forward”, dial “*91”, wait for dial tone, then hang up.
 - *92 Delayed Call Forward. Dial “*92”, wait for dial tone. Then dial the forward number and “#” for a dial tone, then hang up.
 - *93 Cancel Delayed Call Forward. To cancel Delayed Call Forward, dial “*93”, wait for dial tone, then hang up.
- Flash/Hook Toggles between active call and incoming call (call waiting tone). If not in conversation, flash/hook will switch to a new channel for a new call.

You MUST activate your device ONLINE BEFORE you install it. Your device WILL NOT work until it is activated. If you have problems during activation or installation please call 1-888-289-1593 and press option 1. DO NOT ATTEMPT TO INSTALL YOUR DEVICE UNTIL YOU HAVE ACTIVATED IT!